


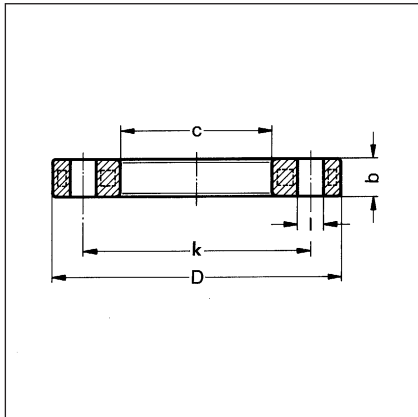

Flansch aus PP mit Stahleinlage, nach DIN 16962/16963 Teil 4 für Vorschweißbunde;

bis DN 150 = PN 10 / PN 16, ab DN 200 = PN 10 gebohrt

Backing flanges PP/St for flange adaptor; up to DN 150 = PN 10/PN 16, from DN 200 drilled to PN 10

d	DN	D	k	b	c	l	AL
25	20	105	75	14	34	14	4
32	25	115	85	14	42	14	4
40	32	140	100	16	51	18	4
50	40	150	110	18	62	18	4
63	50	165	125	18	78	18	4
75	65	185	145	18	92	18	4
90	80	200	160	18	108	18	8
110	100	220	180	18	128	18	8
125	100	220	180	18	135	18	8
140	125	250	210	24	158	18	8
160	150	285	240	24	178	22	8
180	150	285	240	24	188	22	8
200	200	340	295	24	235	22	8
225	200	340	295	24	238	22	8
250	250	406	350	31	288	22	12
280	250	406	350	34	294	22	12
315	300	460	400	34	338	22	12
355	350	520	460	39	376	22	16
400	400	580	515	43	430	26	16
450	500	675	620	54	517	26	20
500	500	675	620	54	533	26	20
560	600	796	725	64	618	30	20
630	600	800	725	58	645	30	20