



Plasson Universal Slip Repair Coupling



PN16	PN16	PN16	PN16	PN16
24-28 _{mm}	31-35 _{mm}	40-43 _{mm}	48-51 _{mm}	60-64 _{mm}
0.94"-1.1"	1.22"-1.37"	1.57"-1.69"	1.89"-2.00"	2.36"-2.52"



**SLIDE
N'SEAL**
Pull-Out Resistant

- Suits a variety of plastic and metal pipe materials
- Each fitting designed to fit a wide range of diameters
- Zero force pipe insertion – can slide freely back and forth
- Thick o-ring seal – compensates for poor pipe quality
- Seal compression increases as pressure increases
- Robust PP body and nut – high impact strength and stress resistance
- Long sealing area – can bridge over damaged section or gap between pipes
- Total reliability – PN16, designed to last 50 years
- Suitable for all cold water applications up to 45°

Simple Assembly

1



Mark pipe insertion depth

2




Insert the pipe


3



Tighten the nut

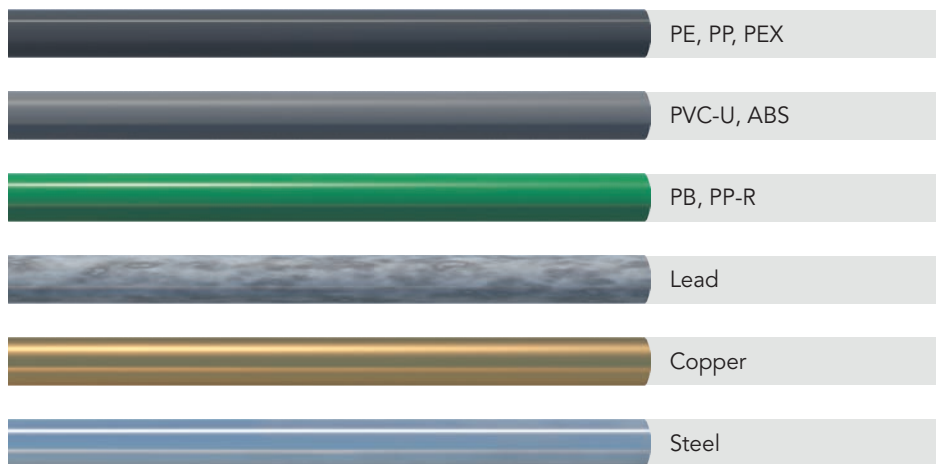

Geometry

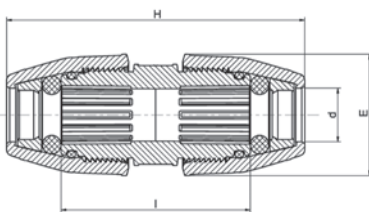

Catalog No.	d - Diameter range per product	Popular pipes*	H	E	I
176100024028	24-28	25mm, ¾"	200	66	133
176100031035	31-35	32mm, 1"	210	76	143
176100040043	40-43	40mm, 1¼"	250	89	151
176100048051	48-51	50mm, 1½"	270	101	158
176100060064	60-64	63mm, 2"	310	120	176

* For further information regarding dimensions, suitable pipes and assembly instructions please scan the code.

